

### STANDARD PATTERN BRONZE WATER GAUGES

Use for all types of liquid level verification; available with 3/8" or 1/2" NPT male pipe connections. Aluminum or plastic composition hand wheels; EPDM gauge glass gaskets standard. Other glass gaskets available.

#### FEATURES

- Ball checks standard on **20-150** models
- Equipped with two copper guard rods
- Standard 1/4" needle drain valve in lower arm
- Rated: 125 psig @ 350°F, 300 psig @ 100°F (See note!)
- CRN Registered

Model Number	Pipe Size (in.)	Glass O.D. & Length	Wt./100 (lbs.)	Wheel Type
20-101	3/8	5/8 x 10	145	ALUMINUM
20-102	3/8	5/8 x 10	145	COMPOSITION
20-104	1/2	5/8 x 12	160	ALUMINUM
20-105	1/2	5/8 x 12	160	COMPOSITION
20-150	1/2	5/8 x 12	160	ALUMINUM
20-151	1/2	5/8 x 12	160	COMPOSITION

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.

### 20-100 & 20-150 SERIES



### HEAVY PATTERN BRONZE WATER GAUGES

All standard 20 Series features but with a heavier valve body pattern for higher service ratings.

#### FEATURES

- Available with 3/8", 1/2" and 3/4" MNPT fittings
- Ball checks standard on **20-250** models
- Polished finish on **25-200** valves
- Rated: 200 psig @ 400°F, 400 psig @ 100°F (See note!)
- CRN Registered

Model Number	Pipe Size (in.)	Glass O.D. & Length	Wt./100 (lbs.)	Wheel Type
20-201	3/8	5/8 x 10	185	ALUMINUM
20-202	3/8	5/8 x 10	189	COMPOSITION
20-204	1/2	5/8 x 12	205	ALUMINUM
20-205	1/2	5/8 x 12	205	COMPOSITION
20-207	3/4	3/4 x 16	270	ALUMINUM
20-208	3/4	3/4 x 16	270	COMPOSITION
20-250	1/2	5/8 x 12	195	ALUMINUM
20-251	1/2	5/8 x 12	200	COMPOSITION
20-253	3/4	3/4 x 16	355	ALUMINUM
20-254	3/4	3/4 x 16	360	COMPOSITION
25-201	3/8	5/8 x 10	180	ALUMINUM
25-202	3/8	5/8 x 10	185	COMPOSITION
25-204	1/2	5/8 x 12	190	ALUMINUM
25-205	1/2	5/8 x 12	190	COMPOSITION
25-207	3/4	3/4 x 16	290	ALUMINUM
25-208	3/4	3/4 x 16	295	COMPOSITION


Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.

### 20-200, 20-250 & 25-200 SERIES



## Water Gauges & Accessories

20-300, 20-350,  
25-400 & 25-500 SERIES

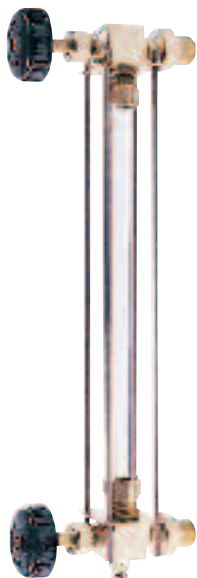

### SQUARE PATTERN BRONZE WATER GAUGES

Available with 1/2" (ASTM B-16 brass bar stock) or 3/4" (B-584 cast bronze) NPT male pipe connections. Four guard rods and EPDM gauge glass gaskets standard. Other glass gaskets available.

#### FEATURES

- Standard 1/4" needle drain valve in lower arm
- Pet cock or Apollo® ball valve drain on request
- Polished finish on **25-400** and **25-500**
- Ball checks standard on **20-350** and **25-500**
- Rated: 200 psig @ 400°F, 400 psig @ 100°F except for **25-400** (See note!)
- **25-400** Rated=125 psig@350°F, 300 psig@100°F (See note!)
- CRN Registered

Model Number	Pipe Size (in.)	Glass O.D. & Length	Wt./100 (lbs.)	Wheel Type
20-304	1/2	5/8 x 12	260	ALUMINUM
20-305	1/2	5/8 x 12	270	COMPOSITION
20-307	3/4	3/4 x 16	345	ALUMINUM
20-308	3/4	3/4 x 16	365	COMPOSITION
20-350	1/2	5/8 x 12	265	ALUMINUM
20-351	1/2	5/8 x 12	265	COMPOSITION
20-353	3/4	3/4 x 16	360	ALUMINUM
20-354	3/4	3/4 x 16	365	COMPOSITION
25-404	1/2	5/8 x 12	285	ALUMINUM
25-405	1/2	5/8 x 12	285	COMPOSITION
25-407	3/4	3/4 x 16	350	ALUMINUM
25-408	3/4	3/4 x 16	350	COMPOSITION
25-501	1/2	5/8 x 12	290	ALUMINUM
25-502	1/2	5/8 x 12	290	COMPOSITION
25-504	3/4	3/4 x 16	355	ALUMINUM
25-505	3/4	3/4 x 16	355	COMPOSITION

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.

### 20-400 & 20-410 SERIES



### SIDE MOUNTED HANDWHEEL WATER GAUGES

Side-mounted handwheels allow water gauge operation in hard-to-reach places; with all the **20 Series** design features.

#### FEATURES

- Ideal for concealed jacketed type boilers
- No guard rod brackets: **20-405, 20-406, 20-410**
- Brackets and guard rods standard: **20-407, 20-408**
- EPDM standard gauge glass gasket
- Compact - requires minimum space
- Standard 1/4" needle drain valve
- Rated: 125 psig @ 350°F, 300 psig @ 100°F (See note!)
- 1-1/4" Extended shank length; 20-410
- CRN Registered

Model Number	Pipe Size (in.)	Glass O.D. & Length	Wt./100 (lbs.)	Wheel Type
20-405-00 RH	1/2	5/8 x 12	165	ALUMINUM
20-406-00 LH	1/2	5/8 x 12	165	ALUMINUM
20-407-00 RH	1/2	5/8 x 12	170	ALUMINUM
20-408-00 LH	1/2	5/8 x 12	170	ALUMINUM
20-410-00 LH	1/2	5/8 x 12	180	ALUMINUM

Note: Service ratings are subject to pressure/temperature ratings of gauge glass and glass gaskets.