


BRONZE SAFETY RELIEF VALVE (soft seat) : Model FGXL - BTB

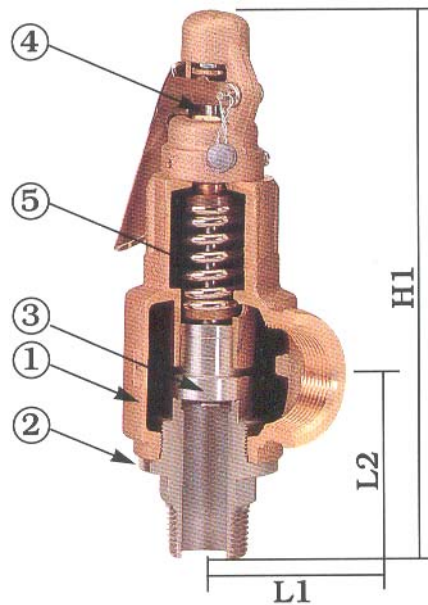

General material

1	Valve Body	BC6 ASTM-B584-C83600
2	Valve Seat	C3604BD ASTM-B16-C3600
3	Disc	TEFLON
4	Stem	C3604BD ASTM-B16-C3600
5	Spring	SPRING STEEL
6	Joint	C3604B ASTM-B16-C36000

Working Pressure : 0.1 – 20 kg/cm²
Working Temp. : - 45°C – 185°C
Working Fluid : Non Corrosive Gas
 Steam
 Hot Water
 Non Corrosive Liquid

Dimension (mm)

P (Inlet)	D (Seat)	P (Outlet)	Lift	L1	L2	H1	W (kg)
1/2"	15	3/4"	2.5	36	54	167	0.73
3/4"	20	1"	3.2	40	66	200	1.30
1"	25	1.1/4"	4.8	50	76	216	1.89
1-1/4"	32	1.1/2"	6.5	57	92	246	2.48
1-1/2"	40	2"	7.3	65	102	285	4.02
2"	50	2.1/2"	9.5	76	110	300	5.55