


# BOB® STAINLESS STEEL FLOAT VALVES & ASSEMBLIES

ALL STANDARD BOB® STAINLESS STEEL FLOAT VALVE ASSEMBLIES consist of valve, float ball (stainless steel or polypropylene) with stainless steel stem for positive level control. For use in industrial applications where caustic fluids or sanitary conditions exist.

All BOB® Stainless Steel Float Valves are NSF Listed.

Stems and Floats AISI 316 type Stainless Steel.

For Special Assemblies list parts separately, i.e., Valve, Stem and Float Ball.

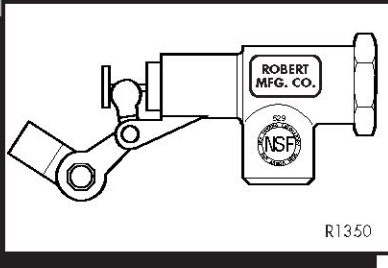


## R1350 VALVE w/DISC & CUP MADE OF VITON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1350-3/8	3/8" FIP	3/8" FIP	1.68	37.5 GPM	58 GPM
R1350-1/2	1/2" FIP	1/2" FIP	1.63	37.5 GPM	58 GPM
R1350-3/4	3/4" FIP	3/4" FIP	1.56	37.5 GPM	58 GPM

## R1350 VALVE w/STEM & FLOAT

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1350-3/8-5	3/8" FIP	3/8" FIP	R1340-5	1/4-20X10"	2.69	85 PSI
R1350-1/2-5	1/2" FIP	1/2" FIP	R1340-5	1/4-20X10"	2.63	85 PSI
R1350-3/4-5	3/4" FIP	3/4" FIP	R1340-5	1/4-20X10"	2.56	85 PSI

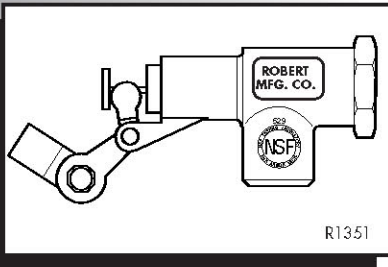


## R1351 VALVE w/DISC & CUP MADE OF TEFLON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1351-3/8	3/8" FIP	3/8" FIP	1.68	37.5 GPM	58 GPM
R1351-1/2	1/2" FIP	1/2" FIP	1.63	37.5 GPM	58 GPM
R1351-3/4	3/4" FIP	3/4" FIP	1.56	37.5 GPM	58 GPM

## R1351 VALVE w/STEM & FLOAT

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1351-3/8-5	3/8" FIP	3/8" FIP	R1340-5	1/4-20X10"	2.69	85 PSI
R1351-1/2-5	1/2" FIP	1/2" FIP	R1340-5	1/4-20X10"	2.63	85 PSI
R1351-3/4-5	3/4" FIP	3/4" FIP	R1340-5	1/4-20X10"	2.56	85 PSI

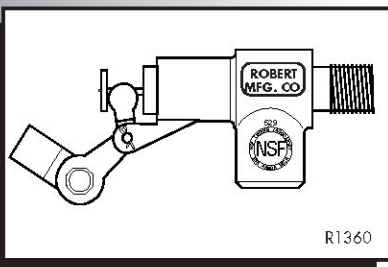

## R1360 VALVE w/DISC & CUP MADE OF VITON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1360-3/4	3/4" MIP	3/4" FIP	1.31	37.5 GPM	58 GPM

## R1360 VALVE w/STEM & FLOAT


ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1360-3/4-5	3/4" MIP	3/4" FIP	R1340-5	1/4-20X10"	2.31	85 PSI

## R1361 VALVE w/DISC & CUP MADE OF TEFLON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1361-3/4	3/4" MIP	3/4" FIP	1.31	37.5 GPM	58 GPM

## R1361 VALVE w/STEM & FLOAT

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1361-3/4-5	3/4" MIP	3/4" FIP	R1340-5	1/4-20X10"	2.31	85 PSI

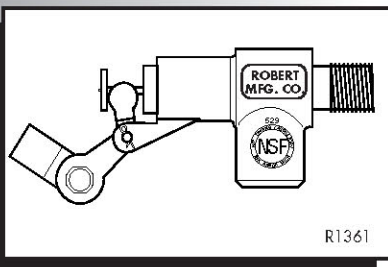


- Viton® is a registered trademark of DuPont-Dow Elastomers.
- Teflon® is a registered trademark of DuPont.
- For Polypropylene Float add suffix "P" to assembly part #.

# BOB® STAINLESS STEEL FLOAT VALVES & ASSEMBLIES

## R1370 VALVE w/DISC MADE OF VITON® & CUP MADE OF TEFLON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1370-1	1" FIP	3/4" FIP	1.5	52.5 GPM	71.1 GPM

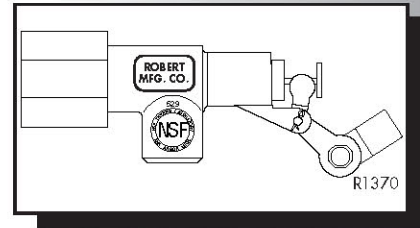


## R1370 VALVE w/STEM & FLOAT

- 106272-2 Adapter Included

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1370-1-5	1" FIP	3/4" FIP	R1340-8	3/8-16X10"	3.44	85 PSI

## R1371 VALVE w/DISC & CUP CUP MADE OF TEFLON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1371-1	1" FIP	3/4" FIP	1.5	52.5 GPM	71.1 GPM

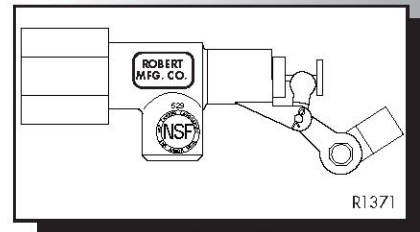

## R1371 VALVE w/STEM & FLOAT

- 106272-2 Adapter Included

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1371-1-5	1" FIP	3/4" FIP	R1340-8	3/8-16X10"	3.44	85 PSI


## R1380 VALVE w/DISC & CUP CUP MADE OF VITON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1380-1-1/4	1-1/4" FIP	1-1/4" FIP	4.25	112 GPM	180 GPM
R1380-1-1/2	1-1/2" FIP	1-1/2" FIP	4.25	112 GPM	180 GPM
R1380-2	2" FIP	2" FIP	4.25	112 GPM	180 GPM

## R1380 VALVE w/STEM & FLOAT

- 106272-2 Adapter Included

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1380-1-1/4-5	1-1/4" FIP	1-1/4" FIP	R1340-8	3/8-16X12"	6.25	100 PSI
R1380-1-1/2-5	1-1/2" FIP	1-1/2" FIP	R1340-8	3/8-16X12"	6.25	100 PSI
R1380-2-5	2" FIP	2" FIP	R1340-8	3/8-16X12"	6.25	100 PSI

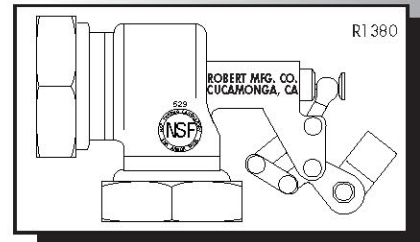


## R1381 VALVE w/DISC MADE OF TEFLON® & CUP MADE OF VITON®

PART NUMBER	PIPE SIZE		WEIGHT LBS.	FREE DISCHARGE FLOW CAPACITY	
	INLET	OUTLET		35 PSI	85 PSI
R1381-1-1/4	1-1/4" FIP	1-1/4" FIP	4.25	112 GPM	180 GPM
R1381-1-1/2	1-1/2" FIP	1-1/2" FIP	4.25	112 GPM	180 GPM
R1381-2	2" FIP	2" FIP	4.25	112 GPM	180 GPM

## R1381 VALVE w/STEM & FLOAT

ASSEMBLY NUMBER	PIPE SIZE		FLOAT BALL	STEM	WEIGHT LBS.	MAX. INLET PRESSURE
	INLET	OUTLET				
R1381-1-1/4-5	1-1/4" FIP	1-1/4" FIP	R1340-8	3/8-16X12"	6.25	100 PSI
R1381-1-1/2-5	1-1/2" FIP	1-1/2" FIP	R1340-8	3/8-16X12"	6.25	100 PSI
R1381-2-5	2" FIP	2" FIP	R1340-8	3/8-16X12"	6.25	100 PSI

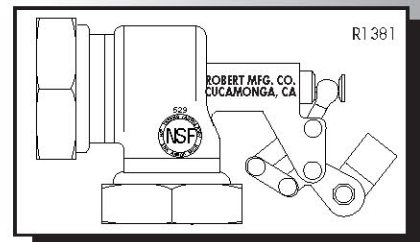

- Viton® is a registered trademark of DuPont-Dow Elastomers.
- Teflon® is a registered trademark of DuPont.